



■ Specification

Model name	CP910E
Print method	Sublimation thermal transfer method
Number of gradations	256 per colour
Display colours	16.7 million
Print paper	Roll paper
Head resolution	325 DPI (1280 dots)
Paper size (mm)	S size: 105×110 L size: 110×160
Print size (mm)	S size: 75×100 L size: 93.7×125
Print resolution (dot)	S size: 1280×600 L size: 1280×1200
Print time (sec)	S size: Approx. 12 sec (3P) L size: Approx. 21 sec (3P)
Paper magazine capacity	S size: 200 (3P) / 130 (4P) L size: 130 (3P) / 90 (4P)
Dimensions (mm)	280 (W) × 400 (D) × 150 (H)
Weight	Approx. 11 kg
Power supply	AC220-240V 50Hz
Power consumption	Approx. 1.2A (25°C Full black) / Approx. 1.0A (25°C Full black) :Save mode
Memory	8 MB, 3-frame memory
Interface	S-Video/Composite video
Compliance	TÜV-GM / CE (MDD,EMCD)
Paper tray	Built into main unit

■ Options

Model name	Specifications
CK900S	Standard paper / S size Ink sheet (200 sheets)
CK900L	Standard paper / L size Ink sheet (130 sheets)
CK900S4P	Surface-coated paper / S size Ink sheet (130 sheets)
CK900L4P	Surface-coated paper / L size Ink sheet (90 sheets)

■ Dimensions (mm)

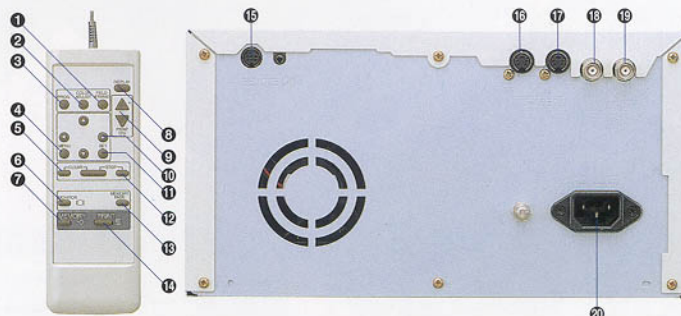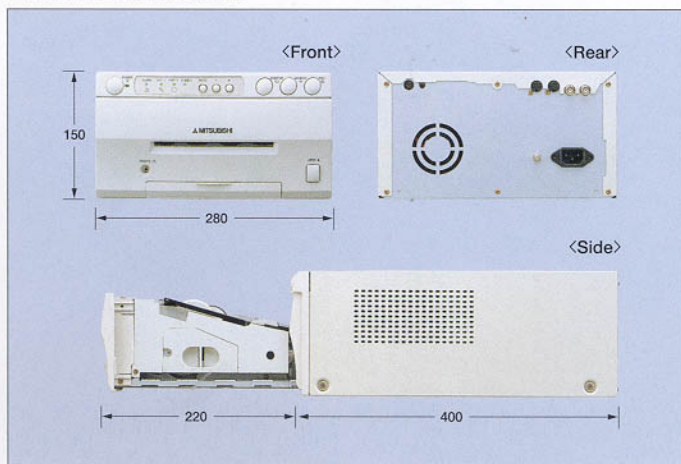

- ① Field/Frame button ② Image adjustment button ③ Program button ④ Menu button
 ⑤ Clear button ⑥ Monitor button ⑦ Memory button ⑧ Display button ⑨ Print sheet
 number button ⑩ Shift button ⑪ Set button ⑫ Stop button ⑬ Memory page button ⑭ Print
 button ⑮ External remote ⑯ S video input socket ⑰ S video output socket ⑱ Composite
 video input socket ⑲ Composite video output socket ⑳ Power socket